





aerospace
 climate control
 electromechanical
 filtration
 fluid & gas handling
 hydraulics
 pneumatics
 process control
 sealing & shielding

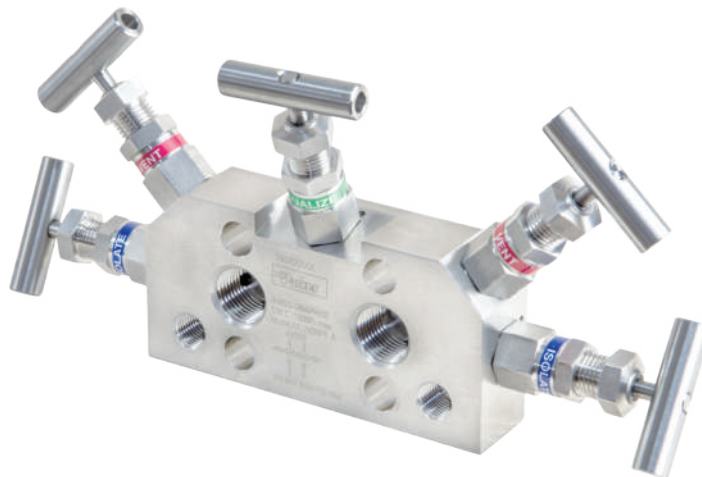

AP Manifolds

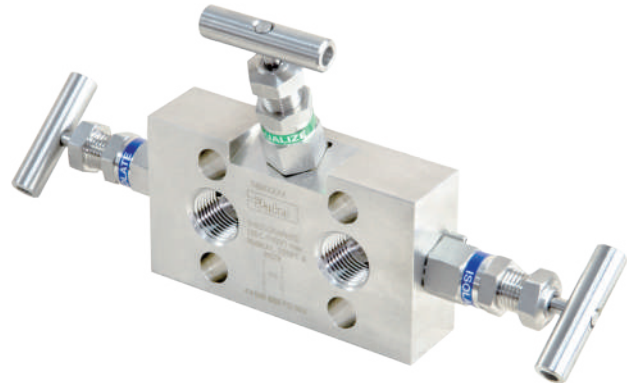

ENGINEERING YOUR SUCCESS.

> INTRODUCTION

Parker AP Manifold Valves are a consolidation of single valves into a block and allow engineers the flexibility to perform various tasks and functions while reduce installation costs and improve safety performance. It have been engineered for use at pressures up to 6,000 PSI (414 bar) and temperatures as high as 1,000 °F (538 °C). A non-rotating lower stem helps to extend packing life by removing rotation from the packing area. Stem packing below the threads isolates the thread lubricant from the flow, ensuring adequate lubrication regardless of the media.

Continuous product development may from time to time necessitate changes in the details contained in this catalogue. Parker Hannifin reserve the right to make such changes at their discretion and without prior notification. All dimensions shown in this catalogue are approximate and subject to change.



WARNING

FAILURE, IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

> FEATURES AND SPECIFICATIONS

10. Handle

Safty solid bar handle for ease of operation

4. Packing adjuster

For maximum packing stability and performance, simple and easily adjustable for gland wear compensation.

3. Lock nut

A secure anti vibration locking mechanism to prevent inadvertent gland packing adjuster loosening.

15. Label

providing colour coded functional identification.

2. Bonnet

Heat code for traceability bonnet with replaceable sealing washer

11. Lock pin

Bonnet locking pin to prevent accidental removal fitted as standard.(behind)

13. Bonnet/Body washer

Annealed sealing washer to ensure complete atmospheric leakage and allowing on site retrofit of bonnets with 100% re-sealing assurance

1. Valve body

Heat coded on body for traceability

For safty reliable and repeatable performance

12. Set screw

Compact design with socket head set screw

14. Dust wiper

Graphite dust wiper protect valve from external contamination

6. Upper stem

Safety back seated upper stem prevents stem blowout

8. Ball

Rolling ball reduce operate torque for ease of operation

7. Lower stem

None rotate lower stem provide low operating torque, long service life. Improve Performances and reliability.

9. Thrust bush

Anti rotational adjustor bush ensures uniform packing compression, maximising pressure tight sealing and limiting cold flow passages.

5. Packing

Packing below the threads protects thread lubricants from media and isolates the lubricants from the media.

| Item | Part | Material |
|------|--------------------|-----------------------|
| 1 | Valve Body | ASTM A479 316SS |
| 2 | Bonnet | ASTM A479 316SS |
| 3 | Lock nut | ASTM A479 316SS |
| 4 | Packing adjuster | ASTM A479 316SS |
| 5 | Packing | Graphite / PTFE |
| 6 | Upper stem | ASTM A479 316SS |
| 7 | Lower stem | ASTM A479 316SS |
| 8 | Ball | ASTM A276 440C |
| 9 | Thrust Bush | ASTM A479 316SS |
| 10 | Handle | ASTM A479 316SS |
| 11 | Lock pin | 18-8(1.4310) |
| 12 | Set screw | A2-70 Stainless Steel |
| 13 | Bonnet/Body washer | ASTM A479 316SS |
| 14 | Dust wiper | Graphite |
| 15 | Label | Plastic |

> SPECIFICATIONS


- Height closed = 59mm (2.32") ref.
- Height open = 63.5mm (2.5") ref.
- Stainless steel construction.
- Maximum standard pressure up to 6,000 psig (414 barg).
- Temperature rating -54°C to +538°C (-65F to +1000F).
- PTFE standard gland packing (Graphite optional).
- Maximum temperature PTFE 232°C (450F).
- Maximum temperature Graphite 538°C (1000F).
- Standard orifice: 4mm



> FEATURES

- Safety solid bar handle
- Safety back seated upper stem prevents stem blowout
- Graphite Dust wiper protect valve from external contaminates
- Packing below the threads protects thread lubricants from media and isolates the lubricants from the media.
- Stem swivel above the packing eliminates entrapment area and increases packing life.
- Non-rotating lower stem provide low operating torque, long service life. Improve Performances and Reliability.
- Bonnet locking pin to prevent accidental removal fitted as standard.
- 316 stainless steel construction.
- 100% factory tested.
- NACE certified wetted parts available.
- Heat code traceable body and bonnet.

Pressure vs. Temperature

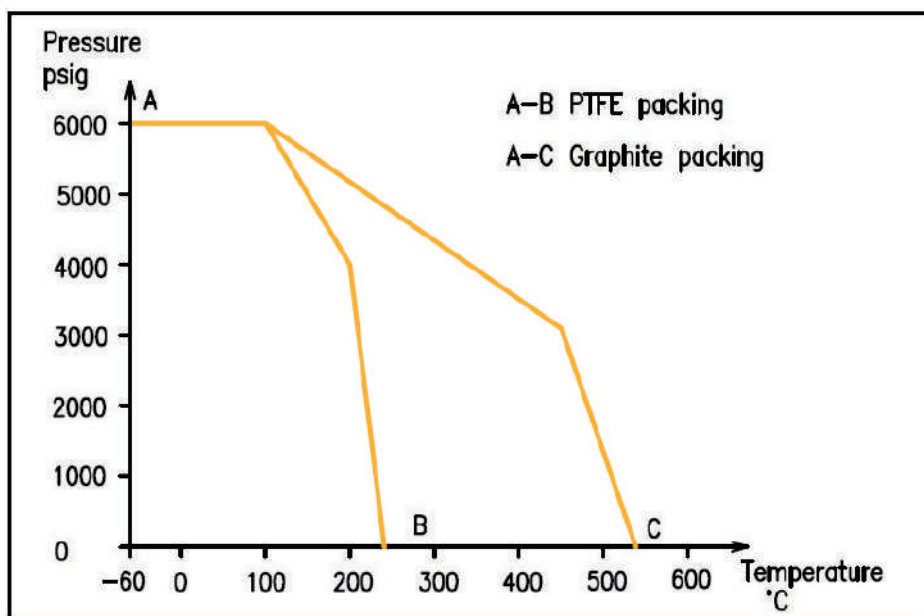


> Construction Dimensions

All dimensions shown in this catalogue are approximate and subject to change.

Remote mount static pressure two valve manifolds

This series of two-valve manifolds combine valves into one block to perform isolation, bleed and calibration of pressure transmitters, gauges and switches.

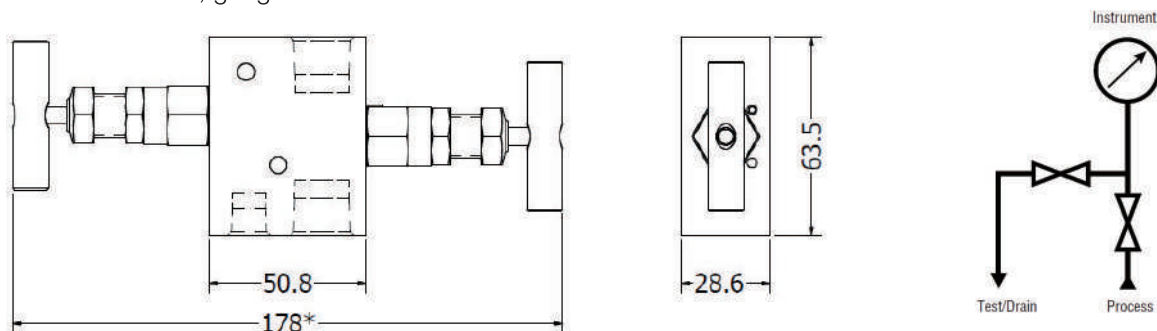


TRS2VF & TRS2VFG

| Part No. | Inlet/Process | Outlet/Inst. | Drain/bleed/test | Packing |
|----------|-----------------|-----------------|------------------|----------|
| TRS2VF | 1/2" female NPT | 1/2" female NPT | 1/4" female NPT | PTFE |
| TRS2VFG | 1/2" female NPT | 1/2" female NPT | 1/4" female NPT | Graphite |

> Direct mount static pressure two valve manifolds

This series of two valve manifolds is designed for direct mounting to process measurement pressure transmitters. Standard functions include isolation and bleed.

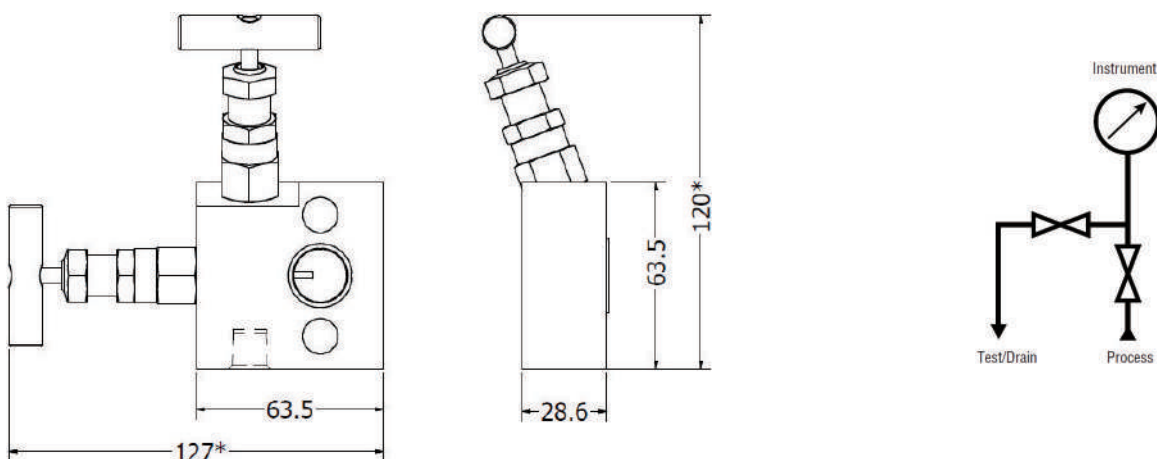


TDS2VFFL & TDS2VFFLG

| Part No. | Inlet/Process | Outlet/Inst. | Drain/bleed/test | Packing | Seal ring |
|-----------|-----------------|--------------|------------------|----------|-----------|
| TDS2VFFL | 1/2" female NPT | Flanged | 1/4" female NPT | PTFE | PTFE |
| TDS2VFFLG | 1/2" female NPT | Flanged | 1/4" female NPT | Graphite | Graphite |

Manifold supply with 2 off 7/16 UNF x 1.625" zinc plated carbon steel bolts


> Remote mount Three valve manifold

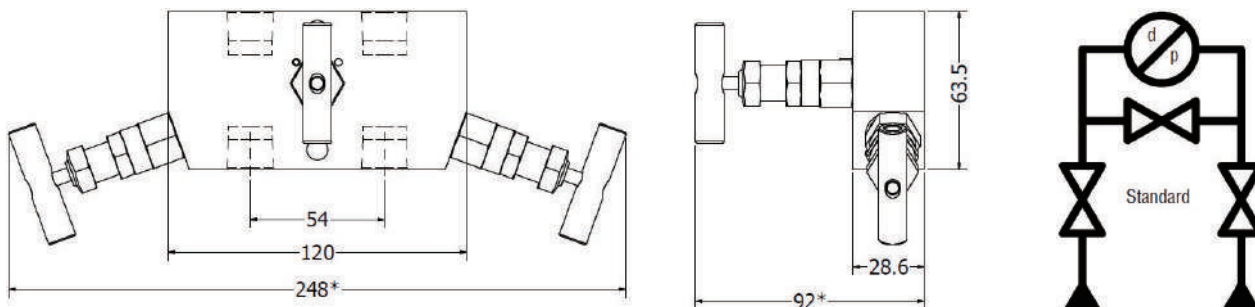

TRS3VF & TRS3VFG

| Part No. | Inlet/Process | Outlet/Inst. | Drain/bleed/test | Packing |
|----------|-----------------|-----------------|------------------|----------|
| TRS3VF | 1/2" female NPT | 1/2" female NPT | / | PTFE |
| TRS3VFG | 1/2" female NPT | 1/2" female NPT | / | Graphite |

> Direct mount Three valve manifold

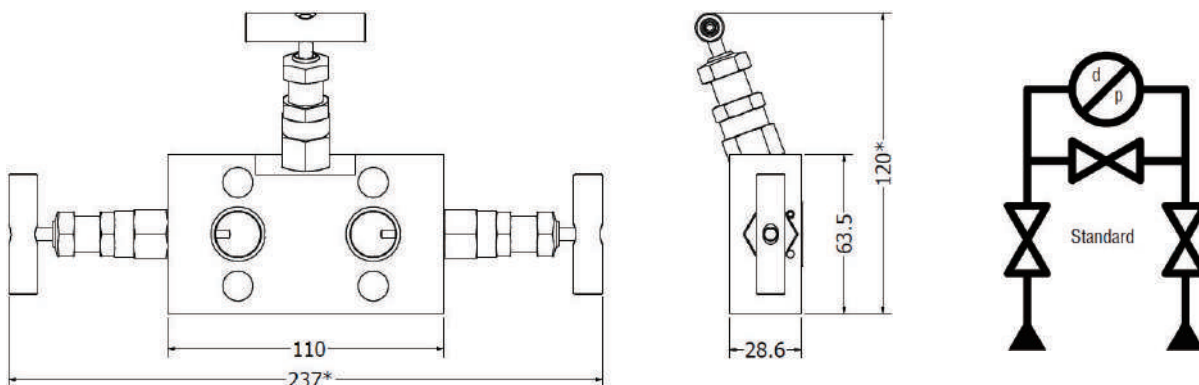


TDS3VFFL & TDS3VFFLG

| Part No. | Inlet/Process | Outlet/Inst. | Drain/bleed/test | Packing | Seal ring |
|-----------|-----------------|--------------|------------------|----------|-----------|
| TDS3VFFL | 1/2" female NPT | Flanged | / | PTFE | PTFE |
| TDS3VFFLG | 1/2" female NPT | Flanged | / | Graphite | Graphite |

Manifold supply with 4 off 7/16 UNF x 1.625" zinc plated carbon steel bolts

> Remote mount Five valve manifold

Compact design manifold for remote installation from differential pressure transmitters.

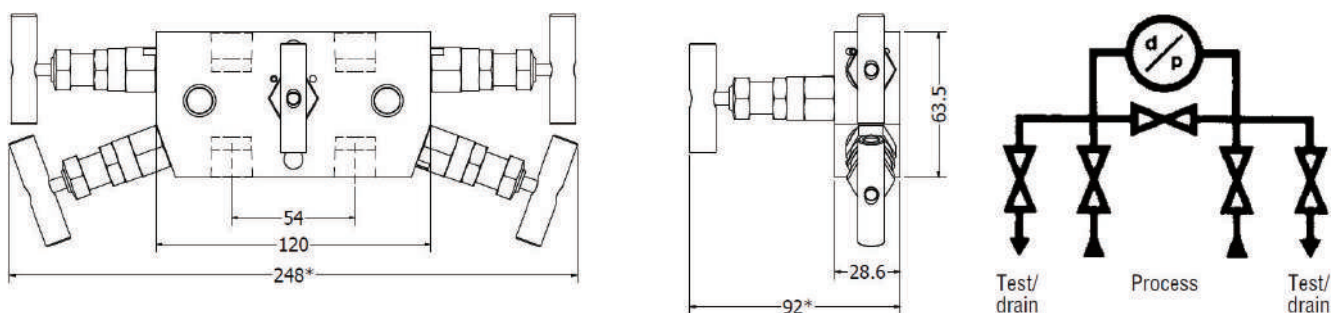


TRS5VF & TRS5VFG

| Part No. | Inlet/Process | Outlet/Inst. | Drain/bleed/test | Packing |
|----------|-----------------|-----------------|------------------|----------|
| TRS5VF | 1/2" female NPT | 1/2" female NPT | 1/4" female NPT | PTFE |
| TRS5VFG | 1/2" female NPT | 1/2" female NPT | 1/4" female NPT | Graphite |

> Direct mount Five valve manifold

Compact design particularly suited for enclosure installation and for direct mounting to differential pressure transmitters with 54mm/2.125" mounting centres.

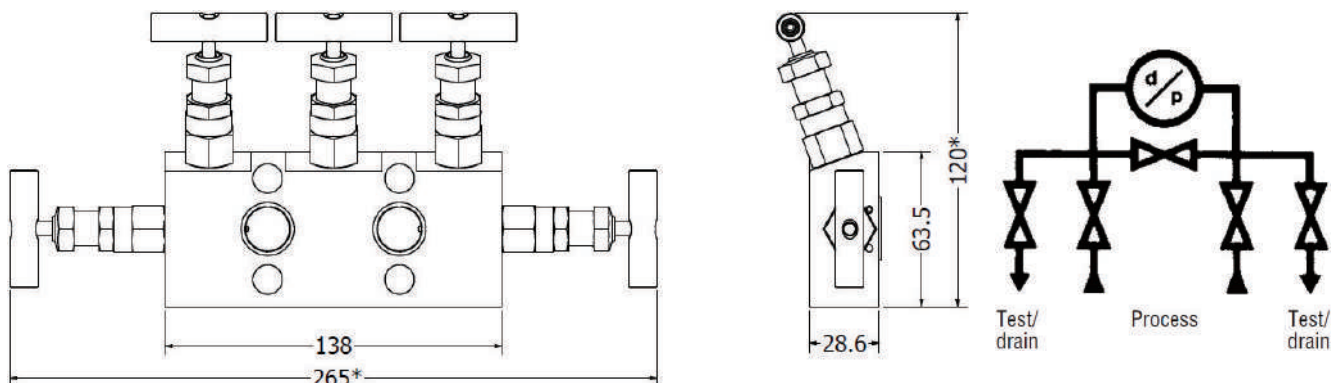

TDS5VFFL & TDS5VFFLG

| Part No. | Inlet/Process | Outlet/Inst. | Drain/bleed/test | Packing | Seal ring |
|-----------|-----------------|--------------|------------------|----------|-----------|
| TDS5VFFL | 1/2" female NPT | Flanged | 1/4" female NPT | PTFE | PTFE |
| TDS5VFFLG | 1/2" female NPT | Flanged | 1/4" female NPT | Graphite | Graphite |

Manifold supply with 4 off 7/16 UNF x 1.625" zinc plated carbon steel bolts

Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates, Dubai
Tel: +971 4 8127100
parker.me@parker.com

AT – Austria, Wiener Neustadt
Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener Neustadt
Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AZ – Azerbaijan, Baku
Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles
Tel: +32 (0)67 280 900
parker.belgium@parker.com

BG – Bulgaria, Sofia
Tel: +359 2 980 1344
parker.bulgaria@parker.com

BY – Belarus, Minsk
Tel: +375 17 209 9399
parker.belarus@parker.com

CH – Switzerland, Etoy
Tel: +41 (0)21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany
Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst
Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup
Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid
Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa
Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens
Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budaörs
Tel: +36 23 885 470
parker.hungary@parker.com

IE – Ireland, Dublin
Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IT – Italy, Corsico (MI)
Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty
Tel: +7 7273 561 000
parker.easteurope@parker.com

NL – The Netherlands, Oldenzaal
Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Asker
Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira
Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest
Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow
Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga
Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SK – Slovakia, Banská Bystrica
Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto
Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul
Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev
Tel: +380 44 494 2731
parker.ukraine@parker.com

UK – United Kingdom, Warwick
Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park
Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

North America

CA – Canada, Milton, Ontario
Tel: +1 905 693 3000

US – USA, Cleveland
Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill
Tel: +61 (0)2-9634 7777

CN – China, Shanghai
Tel: +86 21 2899 5000

HK – Hong Kong
Tel: +852 2428 8008

IN – India, Mumbai
Tel: +91 22 6513 7081-85

JP – Japan, Tokyo
Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul
Tel: +82 2 559 0400

MY – Malaysia, Shah Alam
Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington
Tel: +64 9 574 1744

SG – Singapore
Tel: +65 6887 6300

TH – Thailand, Bangkok
Tel: +662 186 7000-99

TW – Taiwan, Taipei
Tel: +886 2 2298 8987

South America

AR – Argentina, Buenos Aires
Tel: +54 3327 44 4129

BR – Brazil, Sao Jose dos Campos
Tel: +55 800 727 5374

CL – Chile, Santiago
Tel: +56 2 623 1216

MX – Mexico, Apodaca
Tel: +52 81 8156 6000

18-11-A ING-EN-8P- AP Manifold

Parker Hannifin Instrumentation



ENGINEERING YOUR SUCCESS.